


PERKINS	ENGINE	ALTERNATOR	WEIGHT (KG)
GBW15P	403C-15G	E1S13 M/4/13	472
GBW22P	404C-22G	E1S13 M/4/19	534

DEUTZ	ENGINE	ALTERNATOR	WEIGHT (KG)
GBW15D	D2009L03	E1S13 M/4/13	470
GBW22D	D2009L04	E1S13 M/4/19	530

DEUTZ	ENGINE	ALTERNATOR	WEIGHT (KG)
GBW15Y	3TNV88	E1S13 M/4/13	432
GBW22Y	4TNV88	E1S13 M/4/19	495

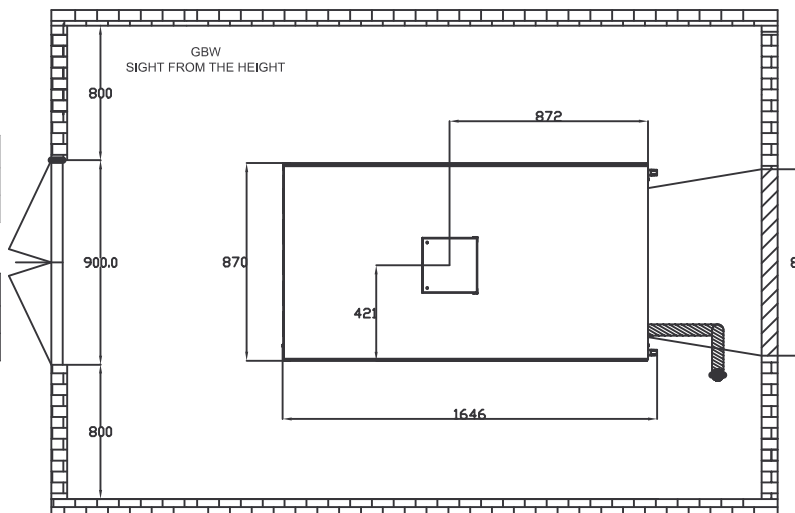

AIR FLOWS (m3/h)	GBW15P	GBW22P	FUEL CONS. (Lt./h)	GBW15P	GBW22P
EXHAUST	165	220	100% LOAD	3.6	5.3
COMBUSTION	65	87	75% LOAD	2.7	4.0
COOLING AIR	3075	3380	CAPACITY (L)	51	51

AIR FLOWS (m3/h)	GBW15D	GBW22D	FUEL CONS. (Lt./h)	GBW15D	GBW22D
EXHAUST	175	224	100% LOAD	3.5	5.3
COMBUSTION	65	87	75% LOAD	2.6	4.0
COOLING AIR	5295	5295	CAPACITY (L)	51	51

AIR FLOWS (m3/h)	GBW15Y	GBW22Y	FUEL CONS. (Lt./h)	GBW15Y	GBW22Y
EXHAUST	70	102	100% LOAD	3.6	5.1
COMBUSTION	63	87	75% LOAD	2.7	3.8
COOLING AIR	3380	3380	CAPACITY (L)	51	51

NOTE: GENERATING SET MUST BE LOCATED WITH, AT LEAST, ONE METER FREE SPACE AROUND FOR MAINTENANCE WORK SURFACE OF COOLING AIR INTAKE LOUVERS MUST BE, AT LEAST, TWICE SURFACE OF COOLING AIR EXHAUST LOUVERS

GBW EXHAUST GRID: 530x630  
INTAKE GRID: 585x655  
EXHAUST SILENCER: 45mm diameter

2007	FECHA	NOMBRE
Dibu Jaala	30 Oct	J J G
Comprobado		
Examinado		



RECOMMENDED INSTALLATION DIMENSIONS  
GENSET SOUNDPROOF  
PERKINS 403C-15G/404C-22G WATER COOLED GBW15P/22P  
DEUTZ D2009L03/D2009L04 WATER COOLED GBW15D/22D  
YANMAR 3TNV88/4TNV88 WATER COOLED GBW15Y/22Y

Nº PIGBW15-22\_S00

Substituto de  
Substituto por