


	GSV195D	GSV220V
A (mm)	1240	1240
B (mm)	1914	1914
B1 (mm)	1232	1232
C (mm)	3400	3400
C1 (mm)	1650	1650
D (mm)	300	300
E (mm)	594	594
F (mm)	1140	1140
G (mm)	928	928
H (mm)	160	160
I (mm)	101	101
J (mm)	245	245
K (mm)	1385	1385
L (mm)	915	915
M (mm)	1445	1445
N (mm)	1445	1445
O (mm)	655	655
P (mm)	474	474

MODELO / MODEL	PRIME POWER ENGINE	ALTERNATOR MOTOR	FUEL TANK (LITR)	WEIGHT (KG)
GSW195V	166	7210E	UC2274G	340
GSW220V	194	7220E	UC2274H	340
				2490
				3000

MODELO / MODEL	COMBUSTION	COOLING AIR	EXHAUST GASES	FUEL CONSUMPTION / CONSUMO DE COMBUSTIBLE (L/H)
GSW195V	654	11180	1886	75% LOAD 29.5 100% LOAD 38.3
GSW220V	708	11180	2034	32.4 43.3

COOLING AIR INTAKE
ENTRADA DE AIRE

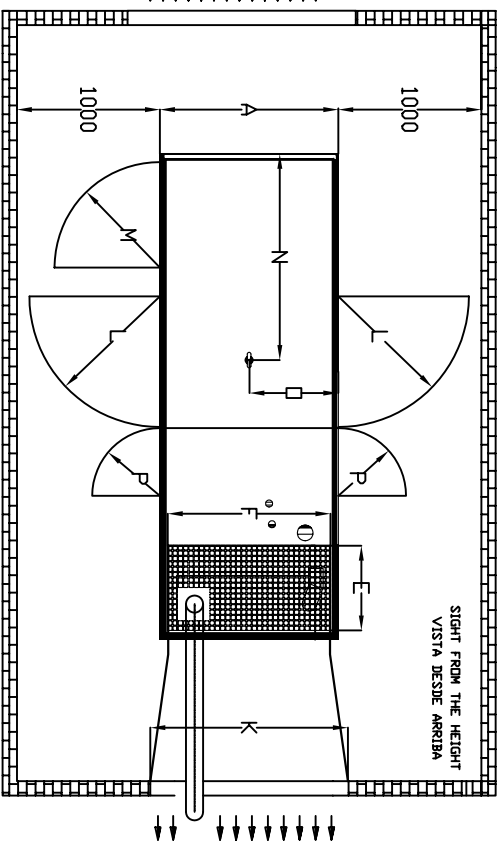

NOTE: GENERATING SET MUST BE LOCATED WITH, AT LEAST, ONE METER FREE SPACE AROUND FOR MAINTENANCE WORK SURFACE OF COOLING AIR INTAKE LOUVERS MUST BE, AT LEAST, TWICE SURFACE OF COOLING AIR EXHAUST LOUVERS

NOTA: EL GENERADOR DEBE SITUARSE CON, AL MENOS, UN METRO LIBRE ALREDEDOR PARA TRABAJOS DE MANTENIMIENTO LA SUPERFICIE DE REJILLA DE REFRIGERACION DE ENTRADA DEBE SER, AL MENOS, DOS VECES LA SUPERFICIE DE LA REJILLA DE SALIDA DE AIRE

* IF IN DOUBT ASK, DO NOT SCALE / EN CASO DE DUDA-PREGUNTAR, NO ESCALAR
* RECOMMENDED INSTALLATION DIMENSIONS FOR STANDARD CONFIGURATION / DIMENSIONES DE INSTALACION RECOMENDADAS PARA CONFIGURACION ESTANDAR
* THE PRODUCER RESERVES THE RIGHT OF MODIFYING THE DIMENSIONS REPRESENTED IN THIS PLANO SIN PREVIO AVISO
EL FABRICANTE SE RESERVA EL DERECHO DE MODIFICAR LAS DIMENSIONES REPRESENTADAS EN ESTE PLANO SIN PREVIO AVISO

2006	DATE	NAME
Drawn		
Checked	16-05-06	
Examined		
SCALE		
RECOMMENDED INSTALLATION DIMENSIONS		
SOUNDPROOF GENSET		
GSW195 - 220 V 1500 RPM		
Replacing		No P165W195-220V 300
Replaced by:		

FRANMAC POWER ENGINEERS