
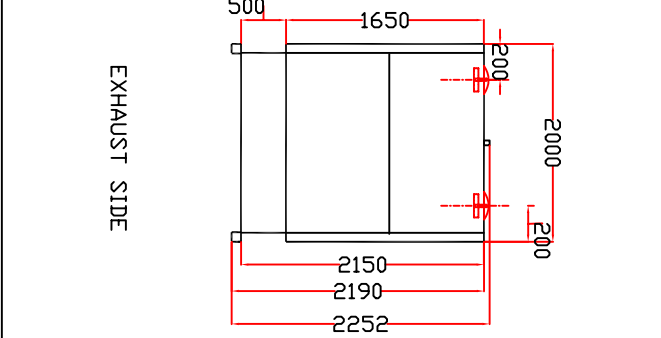
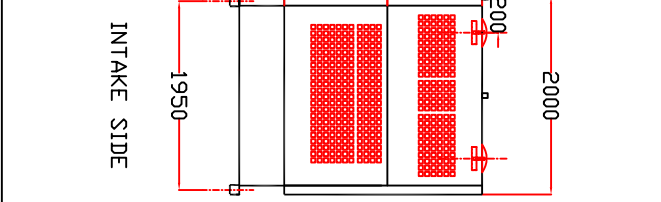


| AIR FLOWS /M <sup>3</sup> /H | GSW530D | GSW560D | FUEL CONS. /L/H | GSW530D | GSW560D |
|------------------------------|---------|---------|-----------------|---------|---------|
| EXHAUST GASES                | 4765    | 5377    | 100% LOAD       | 94.6    | 108.9   |
| COMBUSTION                   | 2092    | 1848    | 75% LOAD        | 73.3    | 84.9    |
| COOLING AIR                  | 30000   | 41000   | 50% LOAD        | -       | -       |

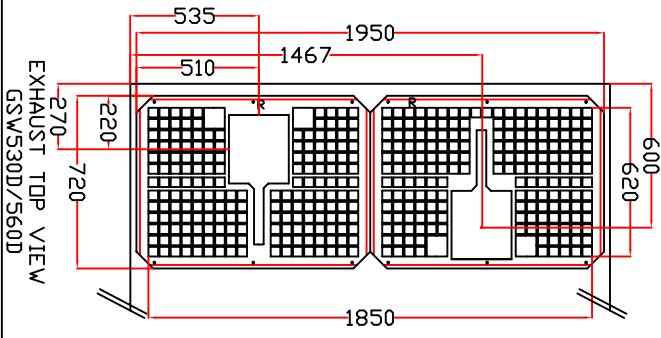

| GSW     | ENGINE     | ALTERNATOR | WEIGHT (KG) |
|---------|------------|------------|-------------|
| GSW530D | BF8M1015C2 | HCI 544D   | 4.105       |
| GSW560D | BF8M1015CP | HCI 544D   | 5.025       |

NOTE: GENERATING SET MUST BE LOCATED WITH, AT LEAST, ONE METER FREE SPACE AROUND FOR MAINTENANCE WORK  
 SURFACE OF COOLING AIR INTAKE LOUVERS MUST BE, AT LEAST, TWICE SURFACE OF COOLING AIR EXHAUST LOUVERS

|                                     |      |      |                             |
|-------------------------------------|------|------|-----------------------------|
| 2004                                | DATE | NAME |                             |
| Drawn                               | JJG  |      |                             |
| Checked                             |      |      |                             |
| RECOMMENDED INSTALLATION DIMENSIONS |      |      |                             |
| SOUNDPROOF GENSET                   |      |      |                             |
| SCALE                               |      |      | No. <b>PRG530D-560D_300</b> |
| GSW530D-560D - 1500 RPM             |      |      | Replacing<br>Replaced by    |