


	GSW65D	GSW80D	GSW110D	GSW145D	GSW170D
A (mm)	1000	1000	1000	1000	1000
B (mm)	1620	1620	1620	1620	1620
B1 (mm)	1520	1520	1520	1520	1520
C (mm)	2200	2200	2200	2600	2600
C1 (mm)	1300	1300	1300	1700	1700
D (mm)	700	700	700	590	590
E (mm)	702	722	771	898	898
F (mm)	695	750	687	866	903
G (mm)	300	300	300	300	300
H (mm)	60	60	80	80	80
I (mm)	630	760	760	789	789
J (mm)	570	570	635	824	875

COOLING AIR INTAKE
ENTRADA DE AIRE

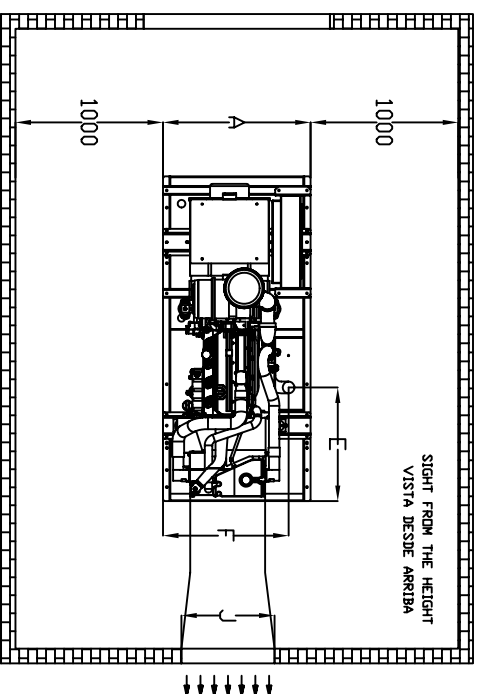

NOTE: GENERATING SET MUST BE LOCATED WITH, AT LEAST, ONE METER FREE SPACE AROUND FOR MAINTENANCE WORK SURFACE OF COOLING AIR INTAKE LOUVERS MUST BE, AT LEAST, TWICE SURFACE OF COOLING AIR EXHAUST LOUVERS

NOTA: EL GENERADOR DEBE SITUARSE CON, AL MENOS, UN METRO LIBRE ALREDEDOR PARA TRABAJOS DE MANTENIMIENTO LA SUPERFICIE DE REJILLA DE REFRIGERACION DE ENTRADA DEBE SER, AL MENOS, DOS VECES LA SUPERFICIE DE LA REJILLA DE SALIDA DE AIRE

MODEL / MODELO	COMBUSTION COMBUSTION	COOLING AIR AIRE DE REFRIGERACION	EXHAUST GASES GASES DE ESCAPE	FUEL CONSUMPTION/ CONSUMO DE COMBUSTIBLE (L/H)	100% LOAD
GSW65D	216	7500	251	10.3	13.7
GSW80D	268	6550	325	11.7	15.7
GSW110D	351	8570	946	16.7	22.2
GSW145D	484	12600	1454	21.9	29.2
GSW170D	607	15120	1602	24.5	32.7

* IF IN DOUBT-ASK, DO NOT SCALE / EN CASO DE DUDA-PREGUNTAR, NO ESCALAR
* RECOMMENDED INSTALLATION DIMENSIONS FOR STANDARD CONFIGURATION /
DIMENSIONES DE INSTALACION RECOMENDADAS PARA CONFIGURACION ESTANDAR
* THE PRODUCER RESERVES THE RIGHT OF MODIFYING THE DIMENSIONS REPRESENTED IN THIS PLANE WITHOUT PRIOR NOTICE
EL FABRICANTE SE RESERVA EL DERECHO DE MODIFICAR LAS DIMENSIONES REPRESENTADAS EN ESTE PLANO SIN PREVIO AVISO

2004	DATE	NAME	
Drawn	JCM		
Checked	JJG		
Exhibited			
SCALE			
RECOMMENDED INSTALLATION DIMENSIONS STANDARD GENSET			
No. P/GSW65D-170D_800			
Replaced by:			
Replaced by:			
POWER ENGINEERING			